

Tinytag Plus 2 Logger with Temperature/Relative Humidity Probe (-25 to +85 °C/0 to 100% RH)

TGP-4505

Issue 4

9th August 2019
E&OE

The Tinytag Plus 2 range of data loggers have a high reading resolution and accuracy and are housed in robust, waterproof (IP68 rated) cases that are designed for use in a wide range of outdoor and industrial applications.

The TGP-4505 has a temperature and relative humidity probe with a 1.5m cable length. This unit features a coated RH sensor that has good resistance to moisture and condensation, ensuring measurement reliability.



Popular Applications

- Environmental monitoring
- Glass house and poly tunnel agriculture
- Food processing and storage
- Pharmaceutical manufacture
- Logistics monitoring
- Conservation Projects

Features

- Temperature and relative humidity recorder
- 32,000 reading capacity
- High accuracy
- High reading resolution
- Fast data offload
- Robust, waterproof case
- Low battery monitor
- User-replaceable battery





Features

Total Reading Capacity	32,000 readings
Memory type	Non Volatile
Trigger Start	Magnetic Switch
Delayed Start	Relative / Absolute (up to 45 days)
Stop Options	When full After n Readings Never (overwrite oldest data)
Reading Types	Actual, Min, Max
Logging Interval	1 sec to 10 days
Offload	While stopped or when logging in minutes mode
Alarms	2 fully programmable; latching


Physical Specification

IP Rating	IP68 water-proof (see notes)
Combined Weight	165g / 5.82oz
Logger	
Operational Range*	-40 °C to +85 °C (-40 °F to +185 °F)
Case Dimensions	
Height	34mm / 1.34"
Width	59mm / 2.32"
Depth	80mm / 3.15"
Probe	
Operational Range	-25 °C to +85 °C
Probe Dimensions	
Length	70mm / 2.76"
Diameter	8mm / 0.31"
Cable Length	1.5m / 59.06"

*The Operational Range indicates the physical limits to which the unit can be exposed, not the reading range over which it will record.

Reading Specification

Temperature	
Reading Range	-25 °C to +85 °C (-13 °F to +185 °F)
Sensor Type	10K NTC Thermistor (external probe)
Response Time	3 mins to 90% FSD in moving air
Reading Resolution	0.01 °C or better
Temperature Stability	0.005 °C/°C Change from 25 °C
Accuracy	

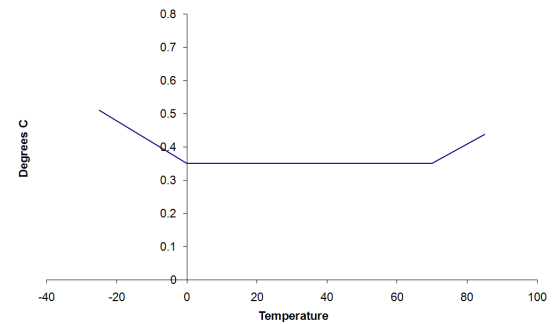


Relative Humidity

Reading Range	0% to 100% RH
Accuracy	±3.0% RH at 25 °C / 77 °F
Reading Resolution	Better than 0.3% RH
Response Time	40 seconds to 90% FSD
Sensor Type	Capacitive (external probe)

RH Sensor Working Range

The working range for the RH sensor is shown in terms of relative humidity / temperature limits.

Although the sensor will not fail beyond these limits, the accuracy will deteriorate.





Notes

The battery fitted in this product is a single cell containing less than 1g of lithium and meets the requirements of the UN Manual of Tests and Criteria, Part III, Subsection 38.3.

Recommended Battery Types SAFT LS14250, Tekcell SBAA02P or Eve ER14250

The logger will operate with other 1/2AA 3.6V Lithium batteries but performance cannot be guaranteed.

Replacement Interval Annually

Before replacing the battery the data logger must be stopped.

When replacing the battery, wait at least one minute after removing the old battery before fitting the new one.

Data stored on the logger will be retained after a battery is replaced.

If used at low temperatures the data logger should be allowed to warm to room temperature before it is opened to avoid condensation forming inside the unit.

The IP68 rating is valid only when the unit's connector cap is fitted and is valid to a depth of 15m (50ft). The IP68 rating does not apply to the unit's RH sensor.

The coated sensor used on this unit provides good protection from moisture and condensation, but in some cases - where the sensor becomes saturated - readings may become unpredictable. Once the sensor has dried out, and provided no residue is left behind, the unit should return to normal reading within 30 minutes.

Any dust, salts or residue that is allowed to build up on the RH sensor will affect the unit's reading accuracy.

The sensor may be cleaned with de-ionised water but not with pure isopropanol or abrasive detergents, as these may damage the coating on the sensor and effect its accuracy.

The RH sensor will resist small amounts of the following chemicals: formaldehyde, ammonia, carbon monoxide, sulphur dioxide, ethylene oxide, hydrogen chloride, hydrogen fluoride, hydrogen peroxide, nitrogen dioxide, methyl chloride, chlorine, freon, methanol, ethanol, isopropanol and ozone. It also offers resistance to ultraviolet rays.

The position of the unit's trigger start switch is indicated by the ... label on the back of the logger. When the "Wait until trigger event" option is selected in the Tinytag Explorer software, the green LED on the unit will flash once every eight seconds, indicating that the unit is waiting to log. When a magnet passed over the label, the green LED will light briefly to indicate that the unit has been activated. Once activated, the green LED will flash every four seconds to indicate that the logger is recording.

Calibration

This unit is configured to meet Gemini's quoted accuracy specification during its manufacture.

As the data logger and its probe are supplied as a matched pair, probes and units are not interchangeable.

We recommend that the calibration of this unit should be checked every six months against a calibrated reference meter.

A certificate of calibration, traceable to a national standard, can be supplied for an additional charge either at the point of purchase, or if the unit is returned for a service calibration.

Approvals

Gemini Data Loggers (UK) Ltd. operates a Business Management System which conforms to ISO 9001 and ISO 14001.



Required and Related Products

To use this data logger you will require the following software:

SWCD-0040: Tinytag Explorer software

and a

CAB-0007-USB: Tinytag Ultra/Plus/View USB Download Cable

The SWCD-0040 software and CAB-0007-USB cable can be ordered together in a pack using the part number SWPK-7-USB.

Further related products:

SER-9500: Tinytag Data Logger Service Kit

ACS-6000: Trigger Start Magnet

Distributed in North America by:

Interworld Electronics Inc.
USA

T: 1-425-223-4311 - 1-877-902-2979

E: sales@interworldusa.com

Canada:

T: 1-604-925-6150 - 1-800-663-6001

E: sales@interworldna.com